

**III B.Tech I Semester Supplementary Examinations, October/November-2019**  
**CONTROL SYSTEMS**

(Electronics and Communication Engineering)

Time: 3 hours

Max. Marks: 70


Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)  
 2. Answering the question in **Part-A** is compulsory  
 3. Answer any **THREE** Questions from **Part-B**  
**(Normal and semi & polar graph sheet are to be supplied)**

**PART - A****(22 Marks)**

- 1 a) Explain the effect of feedback on stability [4M]
- b) What are the characteristics of servomotors? [4M]
- c) What are the Effects of proportional derivative systems? [4M]
- d) What are effects by adding zeros in the root locus? [4M]
- e) Define phase Margin. [3M]
- f) What is controllability? [3M]


**PART - B****(48 Marks)**

- 2 a) What are the advantages of Mathematical Model? [4M]
- b) Write the force equations of the linear translational system shown in figure below. Draw the equivalent electrical network using force-voltage Analogy, with the help of necessary mathematical equations. [8M]

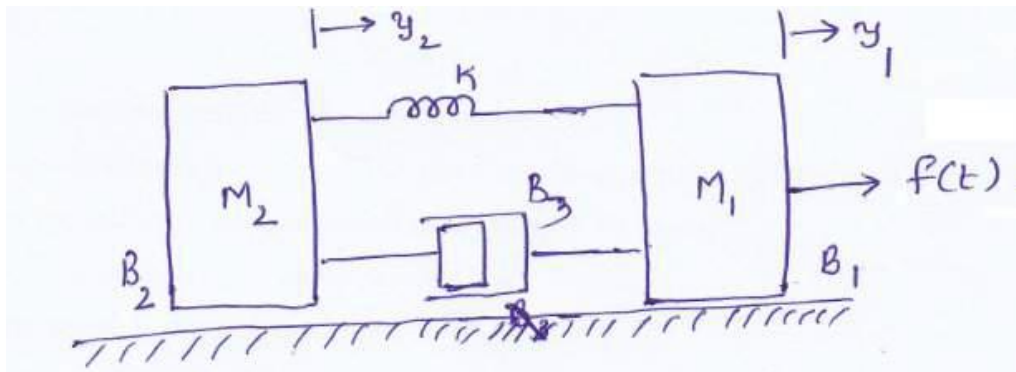

- c) Derive the relationship that shows the effect of feedback on the overall gain of the system. [4M]

- 3 a) Explain the construction and operation of AC servomotor. [8M]  
 b) Find the transfer function for control function as shown in below figure using Mason's gain formula. [8M]

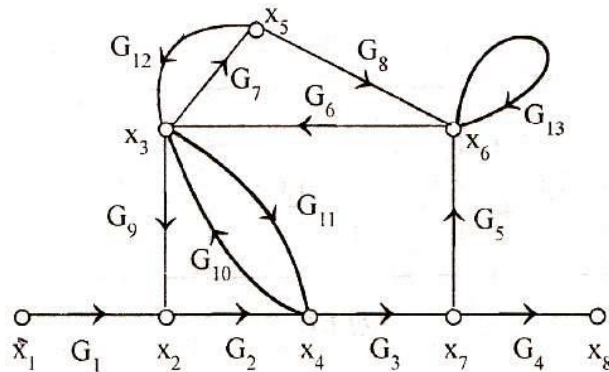

- 4 a) Derive the response of second order system for under damped case and when the input is unit step. [8M]  
 b) Derive the expression for Rise time and peak over shoot for second order for under damped system. [8M]

- 5 Sketch the root locus for the given system [16M]

$$GH(s) = \frac{K}{(s+1)(s+3)(s+6)}$$

Find the breakaway point on the real axis.

- 6 a) Sketch the Bode plot for the open loop transfer function for the unity feedback system given below and assess stability  $G(s) = \frac{100}{(s+1)(2+s)}$  [8M]  
 b) Draw the polar plot of  $G(s)H(s) = \frac{K}{s(s+3)(s+6)}$  and there from determine range of K for stability using Nyquist Criterion. [8M]

- 7 a) Explain the need of PID controller. [6M]  
 b) Construct the state model for a system characterized by the differential equation  $\frac{d^3y}{dt^3} + \frac{6d^2y}{dt^2} + 11\frac{dy}{dt} + 6y = u$ . Give the block diagram representation of the state model. [10M]

\*\*\*\*\*