



C14-C-503

4620

BOARD DIPLOMA EXAMINATION, (C-14)

JUNE—2019

DCE—FIFTH SEMESTER EXAMINATION

QUANTITY SURVEYING—II

Time : 3 hours ]

[ Total Marks : 80


---

PART—A

3×10=30

- Instructions :** (1) Answer **all** questions.  
(2) Each question carries **three** marks.  
(3) Answers should be brief and straight to the point and shall not exceed *five* simple sentences.  
(4) Any data missing may be assumed suitably.

1. State the three types of half-turn staircases with sketch.
2. Calculate the length of cranked bar shown in figure below of 14 mm dia.

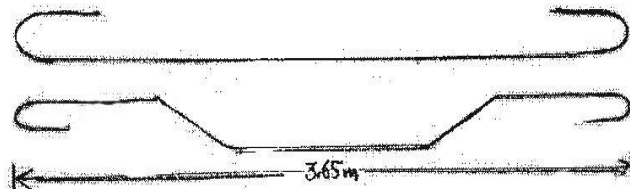


3. Write the expression to calculate length of a straight bar with hooks in a simply supported beam.
4. Explain the cost of material at source and cost of material at site.
5. For a certain work, the lead for HBG metal of 20 mm size is 6 km metalled road and 2 km cart track. The lead statement provides

the following rates of conveyance as per SSR for HBG metal on metalled road :


- 6 km—< 18.05
- 7 km—< 18.70
- 8 km—< 19.35
- 9 km—< 20.50

If the cost of HBG metal at quarry is <math>\text{₹}150</math> per  $\text{m}^3</math>, calculate the cost of  $1 \text{ m}^3</math> of metal at site of work.$$

6. Calculate the quantities of 2 cu. m of CC (1 : 2 : 4).
7. Prepare an estimate for a WBM road of length 200 m for spreading 40 mm HBG metal for wearing course of width 8 m.
8. The cross-section of head of pipe culvert shown in figure below. Calculate the quantity of RR masonry in CM (1 : 6) if the length of head is 6.50 m size of pipe is 0.90 m diameter.

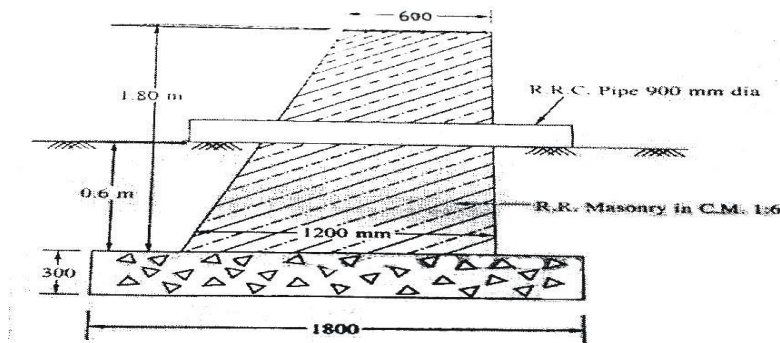

9. Calculate the quantity of 80 mm brick jelly of a circular soak pit of 1.50 m dia shown in figure below.

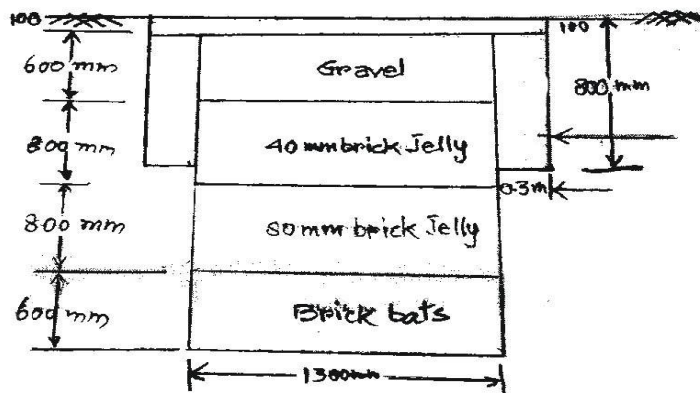


10. Estimate the plastering area for a Baffle wall in aspectic tank dimensions are 1.0 m  $\times$  0.75 m  $\times$  0.10 m.

**PART—B**

10×5=50


- Instructions :** (1) Answer *any five* questions.  
 (2) Each question carries **ten** marks.  
 (3) Answers should be comprehensive and the criteria for valuation are the content but not the length of the answer.  
 (4) Any data missing may be assumed suitably.

- 11.** Find the quantities of the following items for a staircase with two flights of room 4.5 m × 2.0 m :
- (a) RCC for waist slab
  - (b) Landing slab (RCC 1 : 2 : 4)
  - (c) Beam supporting waist slab (RCC 1 : 2 : 4)

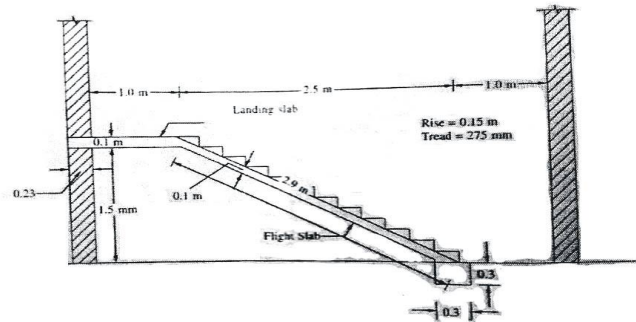

- 12.** Prepare the bar bending schedule of one way simply supported slab of dimensions shown in figure below and find the total quantity of steel required. Reinforcement :
- (a) Main rods 10 mm  $\phi$  at 150 mm c/c
  - (b) Distribution 8 mm  $\phi$  at 200 mm c/c

The slab is to be rested over the entire width of wall of thickness 0.35 m on four sides and depth of slab is 100 mm

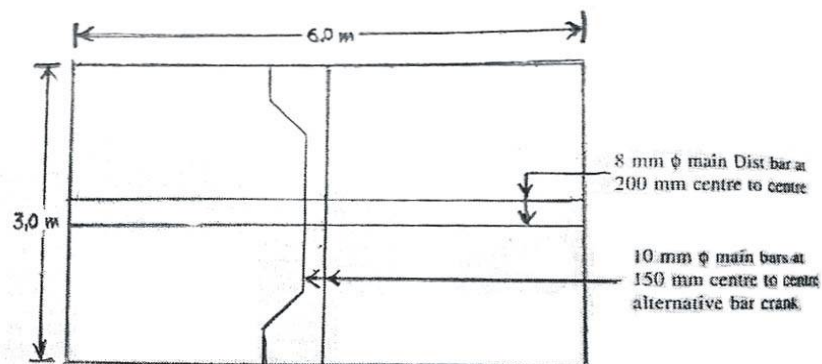

\*

13. Prepare a data sheet and calculate the cost of the items given below using lead statement :

(a) Brick Masonry in CM (1 : 6)—1 m<sup>3</sup>

(b) CC (1 : 3 : 6) using 40 mm HBG metal—1 cu.m

Materials and Labour required for —1 m<sup>3</sup>

CC (1 : 3 : 6)	Brick Masonry in CM (1 : 6)
0.92 m <sup>3</sup> HBG metal 40 mm size	512 Nos. Bricks
___ m <sup>3</sup> sand	0.20 m <sup>3</sup> CM (1 : 6)
___ m <sup>3</sup> cement	1.40 Nos. Masons
0.20 Nos. Masons	0.70 Nos. Man Mazdoors
1.40 Nos. Woman Mazdoors	2.10 Nos. Woman Mazdoors
LS Sundries	1.3 m <sup>3</sup> scaffolding charges
	LS Sundries

Lead statement of material :

Sl. no.	Materials	Rate	Per	Lead	Conveyance Charges
1.	40 mm size HBG metal	1360.70	1 m <sup>3</sup>	15 km	< 4 per km
2.	Sand	775.00	1 m <sup>3</sup>	9 km	< 3 per km
3.	Cement	6400.00	1 MT	Local	-
4.	Bricks	6000.00	1000 Nos	12 Km	< 3 per km/ 1000 Nos

\*

Labour Charges per day :

Mason—< 466

Man Mazdoor—< 316

Woman Mazdoor—< 306

Scaffolding charges—< 120 per m<sup>3</sup>

\*

\*

14. Prepare a data sheet and calculate the cost of the items for flooring with 25 mm thick polished Shahabad stone of 1st quality of size not exceeding 400 mm × 400 mm, laid over set in CM (1 : 10) 16 mm thick base coat for 10 sq. m.

Materials and labor required for flooring with 25 mm thick polished Shahabad stone 10 sq. m :

10.10 sq. m polished stone

0.12 cu. m CM (1 : 10)

0.12 m<sup>3</sup> sand

0.012 m<sup>3</sup> cement

0.96 Nos. Mason I class

2.24 Nos. Mason II class

2.20 Nos. Men Mazdoors

1.10 Nos. Women Mazdoor

*Lead statement :*

<i>Sl. No.</i>	<i>Materials</i>	<i>Rate at source</i>	<i>Lead</i>	<i>Conveyance charges</i>
1.	Polished Stone	< 1,650 per 10 sq. m	8 km	< 10 per 10 sq. m
2.	Sand	< 250 per m <sup>3</sup>	20 km	< 160 for 20 km/1 cu. m
3.	Cement	< 3,400/MT	4 km	< 3 per bag

*Labour charges per day :*

1st Class Mason = < 190.00

2nd Class Mason = < 180.00

Man Mazdoor = < 150

Woman Mazdoor = < 150


Mixing charges for CM = < 30.00/m<sup>3</sup>

\*

\*


15. Prepare the detailed estimate for the water bound macadam (WBM) road of length 1.50 km with the details shown in figure below for the following items of work :

- (a) Earth work for formation
- (b) Granular subbase
- (c) Base course with 65 mm size HBG metal

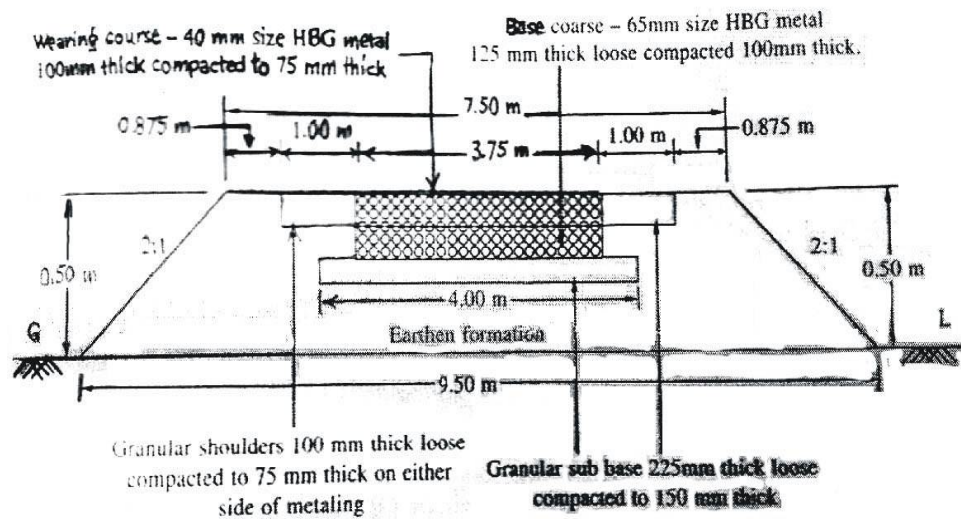

16. Prepare the detailed estimate for the following items of work from drawing of RCC slab culvert. Shown in figure below.

- (a) CC bed (1 : 4 : 8) for foundation under abutment and returns
- (b) RR masonry for abutments and returns
- (c) RCC (1 : 2 : 4) for deck slab for vent way

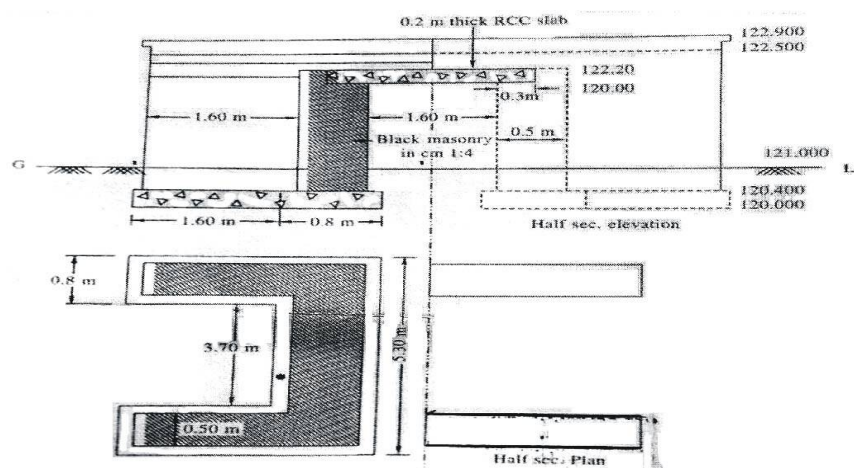


\*




17. Calculate the following quantities of a septic tank shown in figure below :

- (a) CC (1 : 4 : 8) under septic tank
- (b) Brick masonry in CM (1 : 5) for side walls
- (c) RCC work (1 : 2 : 4) for roof cover, scum board and baffle wall

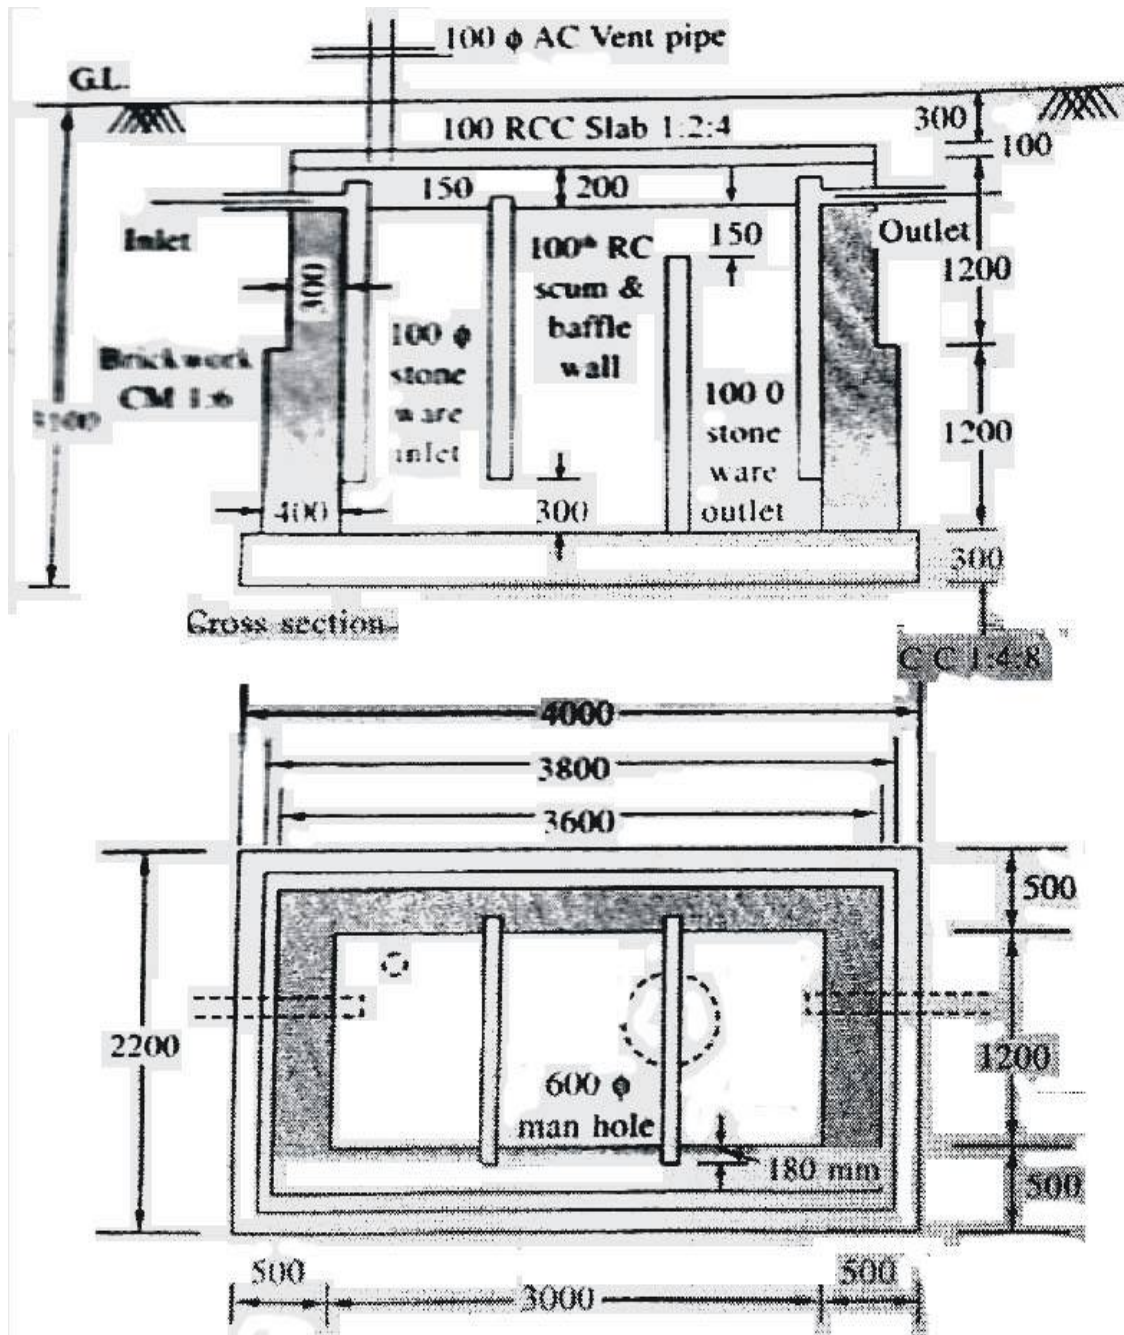

18. Calculate the quantities of the following items of work for overhead tank shown in figure below :
- Plan cement concrete (1 : 4 : 8) under column footings
  - RCC (1 : 2 : 4) for footings columns and two brace beams.
  - RCC (1 : 1½ : 3) for cover slab, base slab and side walls.

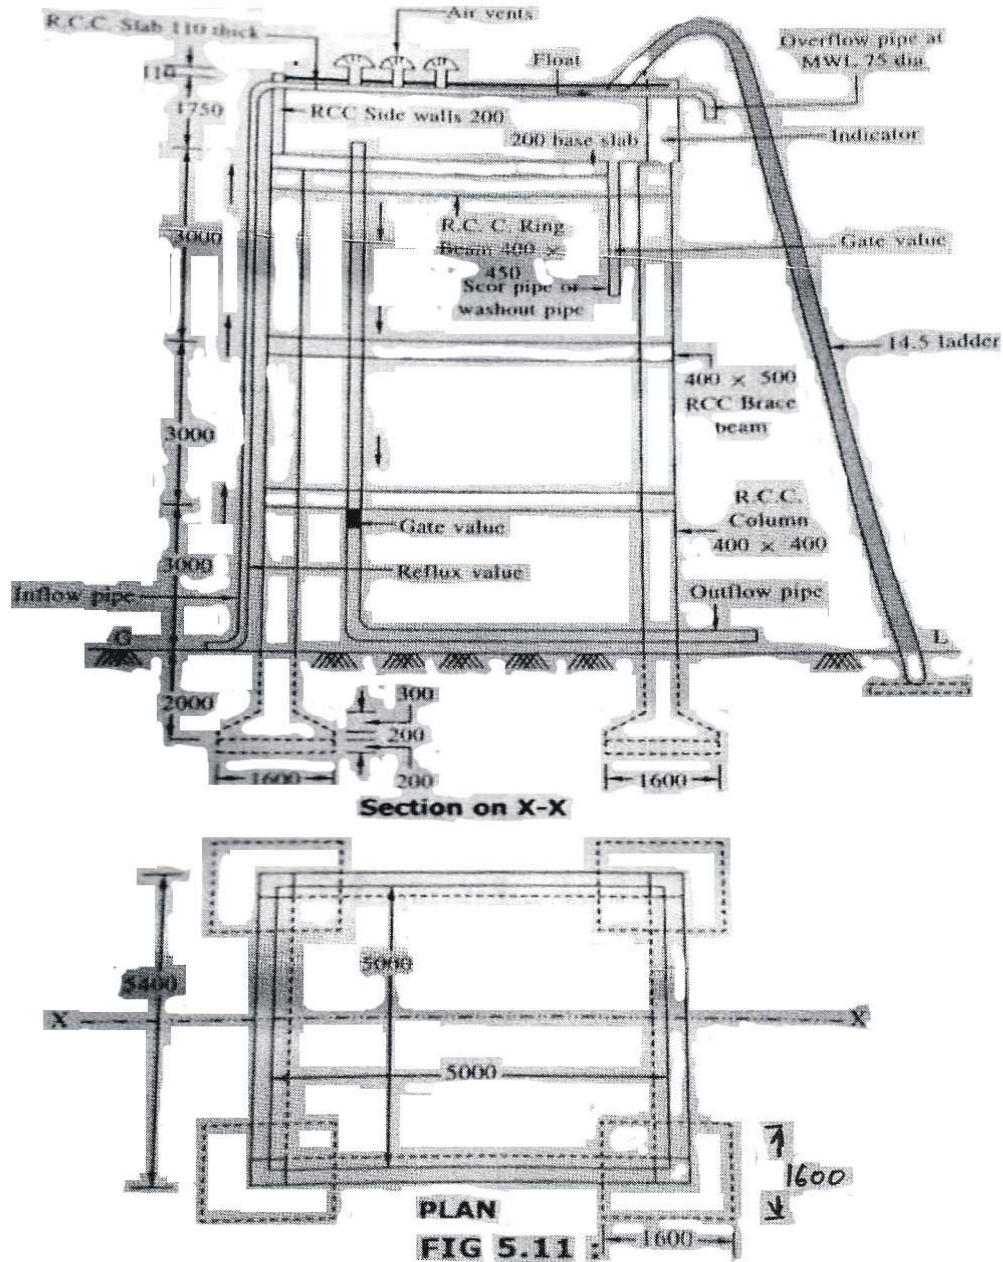

\*\*\*