

*

4253**BOARD DIPLOMA EXAMINATION, (C-14)****JUNE-2019****DME - THIRD SEMESTER EXAMINATION****STRENGTH OF MATERIALS**

Time: 3Hrs

Max.Marks: 80

PART - A**10x3=30M**

Instructions: 1) Answer **all** the questions. and Each question carries **three** marks.

2) Answer should be brife & straight to the point and shall not exceed five simple sentences.

- 1) Briefly explain about composite bar .
- 2) A brass specimen has modulus of elasticity of 1.2×10^5 N/mm² and shear modulus is 0.5×10^5 N/mm². Compute the poisson's ratio.
- 3) Derive an expression for strain energy of a uniform bar.
- 4) Define the following terms:
 - a) Shear force diagram and b) Point of contra flexure.
- 5) A cantilever beam 3 m long carrying a UDL of 2 KN/m over the entire beam. Draw the shear force and bending moment diagrams.
- * 6) A steel strip of thickness 4 mm is coiled on a drum of 1.4 m diameter. Calculate the maximum stress produced by the coiling. Take $E = 2.0 \times 10^5$ N/mm².
- 7) A cantilever of 5 m. long carried a UDL of 8.4 KN/m over the entire length. Calculate the deflection at free end. Assume $E = 2.0 \times 10^5$ N/mm². and $I = 0.8 \times 10^8$ mm⁴.
- 8) Write the advantages of using hollow shafts over solid shafts.

*

- 9) A closed coiled helical spring is made up of 10 mm diameter steel wire has 15 coils of 100 mm mean diameter. Calculate the stiffness of the spring if $G = 8.16 \times 10^4 \text{ N/mm}^2$.
- 10) A boiler shell of 1260 mm diameter and 15 mm thick plate having the efficiency of longitudinal joint is 70%. Determine the minimum tensile stress induced in the shaft, when the internal pressure of 2 N/mm^2 .

PART - B

5x10=50M


Instructions: 1) Answer any **five** questions. Each question carries **ten** marks
 2) Answer should be comprehensive and the criterion for valuation is the content but not length of the Answer.

- 11) A composite bar is made up of two different materials of 1 m long is of 50 mm diameter aluminum over a portion of 0.6 m long and 25 mm diameter of steel bar over the remainder. The bars are stress free at a temperature of 30°C . What will be the stresses in the two bars when the temperature is 21°C if the supports are unyielding.

Assume $\alpha_a = 22.5 \times 10^{-6} / ^\circ\text{C}$ and $\alpha_s = 12 \times 10^{-6} / ^\circ\text{C}$
 $E_a = 0.7 \times 10^5 \text{ N/mm}^2$ and $E_s = 2.0 \times 10^5 \text{ N/mm}^2$.

- 12) A bar 3 m long and 50 mm diameter hangs vertically has a collar securely attached at the lower end. Find the maximum stress induced. When : a) A weight of 250 N falls from 120 mm on to the collar and b) A weight of 2500 N falls from 10 mm on to the collar.
 Take $E = 2.0 \times 10^5 \text{ N/mm}^2$.

- 13) a) A bar of 25 mm diameter and 210 mm is subjected to an axial pull of 50 kN. Calculate the change in volume if $E = 2.13 \times 10^5 \text{ N/mm}^2$ and $\nu = 0.336$
 b) Draw the shear force and bending moment diagrams for a beam shown in the figure:

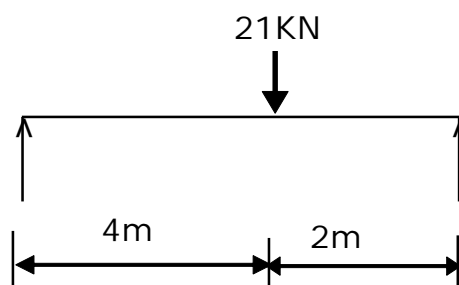

- 14) A freely supported beam of span 4m has extended 1m on right hand support. It is loaded with two point loads of 2 KN and 4 KN at a distance of 3m and 5m from its left end respectively. And also a UDL of 2 KN/m is spread over 3m from left end. Draw shear force and bending moment diagrams.
- 15) Derive the expression for the bending equation.
- 16) A wagon weighing 30 KN. Moving at 7.2 KMPH. How many springs each of 18 coils will be required in a buffer stop the energy of motion during a compression of 250mm. The mean diameter is 25 mm.
Take $G = 0.9 \times 10^5 \text{ N/mm}^2$.
- 17) a) A solid shaft of diameter 10 mm is subjected to a torque of 15 N-m. Calculate the angle of twist over a length of 250 mm.
Take $G = 0.8 \times 10^5 \text{ N/mm}^2$.
- b) A simply supported beam with a central point load on a span of 4 m and the maximum bending stress is 8 N/mm^2 . What is the maximum deflection when the moment of resistance is 18 KN-m.
Assume $I = 3.4 \times 10^8 \text{ mm}^4$ and $E = 0.1 \times 10^5 \text{ N/mm}^2$.
- 18) A cylindrical boiler shell is to withstand an internal pressure of 1 N/mm^2 . The plate is 10 mm thick, the longitudinal efficiency of the joint is 90% while the circumferential one is 50%. Design the boiler shell diameter. If the ultimate stress is 350 N/mm^2 and factor of safety is 4.

* * *

*

*