



C14-M-305

4253

BOARD DIPLOMA EXAMINATION, (C-14)
OCT/NOV—2017
DME—THIRD SEMESTER EXAMINATION

STRENGTH OF MATERIALS

Time : 3 hours]

[Total Marks : 80

PART—A

3×10=30

Instructions : (1) Answer **all** questions.

(2) Each question carries **three** marks.

(3) Answers should be brief and straight to the point and shall not exceed *five* simple sentences.

1. List out three elastic constants and write down the relation between them.
2. A steel bar 300 mm long and diameter 20 mm is subjected an axial pull of 300 kN. Determine the volumetric strain.
[Take $E = 2 \times 10^5 \text{ N/mm}^2$ and $m = 4$]
3. A mild steel of 20 mm diameter and 70 mm gauge length is subjected a sudden axial pull of 50 kN. Calculate the maximum stress and elongation. Take $E = 200 \text{ GPa}$.
4. Draw shear force and bending moment of cantilever beam with uniformly distributed load of entire span.
5. List out the types of beams.

/4253

1

[Contd...

www.ManaResults.co.in

6. Write the assumptions made in theory of simple bending.
7. Find the maximum stress induced in a rectangular beam of width 60 mm and depth 160 mm when bending moment of 600 Nm is applied.
8. A closely coiled helical spring of 20 coils has a wire diameter of 4 mm and mean coil diameter of 30 mm. Find the stiffness of the spring.
[Take $G = 84 \times 10^4 \text{ N/mm}^2$].
9. A solid shaft of 20 mm diameter transmits power at 750 r.p.m. the maximum shear stress in the shaft is 80 N/mm^2 . Determine the power transmitted by the shaft.
10. Derive an expression for hoop stress on thin cylindrical shell.

PART—B

10×5=50


Instructions : (1) Answer *any five* questions.

(2) Each question carries **ten** marks.

(3) Answers should be comprehensive and the criterion for valuation is the content but not the length of the answer.

11. A short column of 350 mm × 350 mm section is to consist of concrete reinforced with steel rods of 20 mm diameter with compressive load of 3 MN. How many reinforcing steel rods are required if stress in concrete is not to exceed 17.5 N/mm^2 and E_s 10 times that of concrete.
12. A steel bar of length 2 m and has a diameter of 50 mm hangs vertically. A load of 20 kN falls on collars attached to the lower end. Find maximum stress when—
 - (a) height of falls is 150 mm;
 - (b) load suddenly applied without impact;
 - (c) load is gradually applied.

13. A cylindrical shell 1 m long, 150 mm internal diameter having thickness of metal as 10 mm is filled with fluid at atmospheric pressure. If an additional 15 cm^3 of fluid is pumped into the cylinder, find the pressure exerted by the fluid on the cylinder and corresponding hoop stress induced.

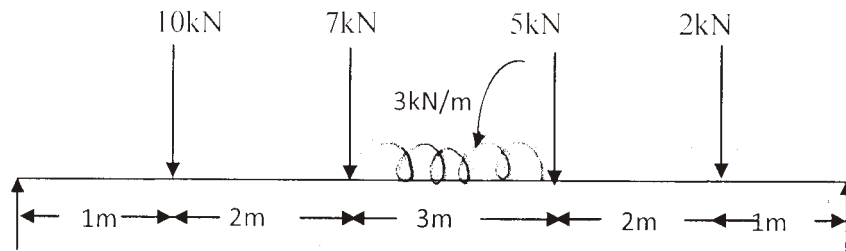

14. Draw shear force and bending moment diagram of a given simply supported beam.

15. A beam of length of 5 m. It has an inverted T-section with $100 \text{ mm} \times 20 \text{ mm}$ flange and $100 \text{ mm} \times 20 \text{ mm}$ web. It is simply supported at the ends and carries a uniformly distributed load of 2 kN/m . Calculate the maximum tensile and compressive stress.

16. A cantilever beam of 2 m long is loaded with point load of 800 N at the free end and distributed load of 3 kN/m over 1.2 m from the fixed end. If the section of rectangular is $75 \text{ mm} \times 150 \text{ mm}$ deep. Calculate the slope and deflection at the free end.

$$[E = 1.1 \times 10^5 \text{ N/mm}^2]$$

17. (a) Derive an equation of

$$\frac{T}{J} = \frac{G}{l} = \frac{\tau}{R}$$

- (b) A solid shaft is to transmit 75 kW at 200 RPM. Taking allowable shear stress is 75 N/mm^2 . Find suitable diameter of the shaft if maximum torque is 35% of greater than the mean torque.

18. A wagon weighting 40 kN moving at 12 kmph. How many springs each of 20 coils will be required in a buffer stop to absorb the energy of motion during a compression of 300 mm and wire diameter 30 mm.

$$[\text{Take } G = 0.8 \times 10^5 \text{ N/mm}^2]$$
