(14 Manlea)

### III B. Tech I Semester Regular/Supplementary Examinations, October/November - 2019 STRUCTURAL ANALYSIS – II

(Civil Engineering)

Time: 3 hours Max. Marks: 70


Note: 1. Question Paper consists of two parts (Part-A and Part-B)

- 2. Answer ALL the question in Part-A
- 3. Answer any **FOUR** Questions from **Part-B**

		<u>PAK1 –A</u>	(14 Marks)
1.	a)	Define and explain Eddy's theorem.	[2M]
	b)	What is Portal frame?	[2M]
	c)	What are advantages and limitations of Moment distribution method?	[2M]
	d)	Explain rotation contribution in Kani's method.	[3M]
	e)	Distribution factor at a joint.	[3M]
	f)	Define "Stiffness" of a frame.	[2M]


PART –B (56 Marks)

2. Calculate Horizontal thrust, Reactions at supports and Maximum bending [14M] moment on a parabolic three-hinged arch is loaded as shown in figure. Draw bending moment for the arch and indicate the position of maximum bending moment.

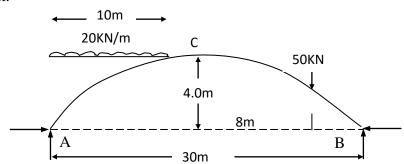


- 3. a) Explain how lateral loads are developed on a structural frame? [4M]
  - b) Explain analysis of a frame subjected to lateral load by adopting Cantilever [10M] method.
- 4. a) Explain situations where the supports in a cable are at different levels. State [4M] position of maximum and minimum tension in a cable with calculations.
  - b) A cable is used to support six equal and equidistant loads over span of 14 m. [10M] The central dip of cable is 1.2 m and loads are 25 KN each. Find the length of the cable required and its sectional area if the safe tensile stress is 150 N/mm<sup>2</sup>.

5. Evaluate the bending moment and shear force diagrams of beam as shown [14M] below by Moment distribution method.



- 6. a) Explain procedural steps of analyzing indeterminate structure using Kani's [7M] method.
  - b) Explain significance of stiffness factor and rotation factor in Kani's method of analysis. What are advantages and limitations of Kani's method?
- A two span continuous beam carries loading as shown below. Solve the [14M] problem by stiffness method.

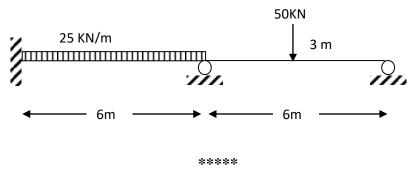

2 of 2

**SET - 2** 

(14 Marks)

## III B. Tech I Semester Regular/Supplementary Examinations, October/November - 2019 STRUCTURAL ANALYSIS – II

(Civil Engineering)

Time: 3 hours Max. Marks: 70

Note: 1. Question Paper consists of two parts (Part-A and Part-B)

2. Answer ALL the question in Part-A

3. Answer any FOUR Questions from Part-B

PART -A

			mai iss)
1.	a)	What do you understand by term horizontal thrust?	[2M]
	b)	What is difference between Arch Action and Beam Action?	[2M]
	c)	What is the role of suspension bridge?	[2M]
	d)	Explain stiffness factor and distribution factors in Moment distribution method.	[3M]
	e)	Explain advantages of Kani's method over Moment distribution method.	[3M]
	f)	Explain degrees of freedom of a joint.	[2M]

[2M]


2. Draw the equilibrium action of a three-hinged arch under action of the a) [7M] external loads.

PART -B

[7M]

**(56 Marks)** 

b) A Two hinged Semi Circular arch of span 20 m is loaded as shown in figure. Determine horizontal thrust and Vertical reactions.

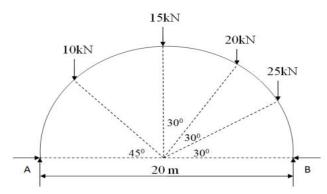

3. Explain how lateral loads are developed on a structural frame. a)

[4M] [10M]


- Explain analysis of a frame subjected to lateral load by Adopting portal b) method.
- 4. Explain different types of cable anchoring methods with neat diagrams. a)

[4M] [10M]

A cable supported on piers 60 m apart at the same level has a central dip of b) 6 m. Calculate the maximum tension in the cable when it is carrying a load of 30 kN/m. Also determine the vertical pressure on the pier, if the backstay is inclined at an angle of 60° to the vertical when the cable passes over a pulley and the cable passes over saddles.


1 of 2

5 Evaluate the bending moment and shear force diagrams of beam in below [14M] figure by Moment distribution method.

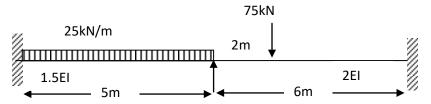

6. Analyze continuous beam in figure by Kani's method.

[14M]

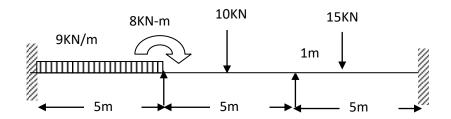

7. Explain Procedural steps involved in solving a Continuous beam with [14M] settlement of supports using Flexibility method of Analysis.

\*\*\*\*

2 of 2

# III B. Tech I Semester Regular/Supplementary Examinations, October/November - 2019 ${\bf STRUCTURAL\ ANALYSIS-II}$

(Civil Engineering)

Time: 3 hours Max. Marks: 70

Note: 1. Question Paper consists of two parts (Part-A and Part-B)

2. Answer ALL the question in Part-A

1

3. Answer any **FOUR** Questions from **Part-B** 

		PART –A	<b>(14 Marks)</b>
1.	a)	Define clearly the terms 'Theoretical arch' and 'Actual arch'.	[2M]
	b)	Explain concept in functioning of roller support in suspension bridge.	[2M]
	c)	Why do we require analysis of structure for lateral loads?	[2M]
	d)	How effect of support sinking is accounted in analysis?	[3M]
	e)	Kani's method of analysis is error correction method. Explain.	[3M]
	f)	Explain Flexibility in a structural frame.	[2M]


#### PART –B (56 Marks)

[7M]

[7M]

2. a) Explain effect of temperature stresses on three hinged arch. [6M]

b) Calculate Horizontal thrust, Reactions at supports and Maximum bending [8M] moment on a parabolic three-hinged arch is loaded as shown in figure.

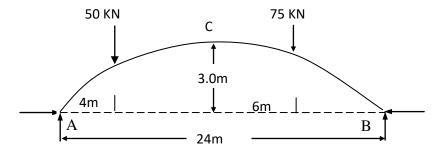

- 3. a) Explain procedure for Cantilever method of analysis.
  - b) Analyze the Portal frame shown in figure by Portal Method.

25KN 4m 6m

1 of 2

4. a) With neat sketch list out various features of a suspension bridge.

[7M] [7M]

b) A cable is used to support six equal and equidistant loads over span of 14 m. The central dip of cable is 2 m and loads are 25 KN each. Find the length of the cable required and its sectional area if the safe tensile stress is 140 N/mm<sup>2</sup>.

[14M]

5. A continuous beam ABCD is fixed at A and simply supported at B and C, the beam CD is overhanging. The spans AB = 6 m, BC = 6 m and over hanging CD = 2 m. The moment of inertia of the span BC is 2I and that of span AB and CD is 1.5I. The beam is carrying a uniformly distributed load of 25 kN/m over span AB, a point load of 50 kN in BC at a distance of 3 m from B and point load of 15 kN at the free end. Determine the fixing moments at A, B and C adopting Moment distribution method and draw the bending moment diagram.

[14M]

6. Analyze continuous beam in figure by Kani's method.

25KN 25KN 10KN/m 1m 5m 5m

Derive stiffness matrices for a bar, truss, beam and frame elements [14M] highlighting their degrees of freedom.

\*\*\*\*

## III B. Tech I Semester Regular/Supplementary Examinations, October/November - 2019 STRUCTURAL ANALYSIS – II

(Civil Engineering)

Time: 3 hours Max. Marks: 70

Note: 1. Question Paper consists of two parts (Part-A and Part-B)

2. Answer **ALL** the question in **Part-A** 

3. Answer any **FOUR** Questions from **Part-B** 

PART –A (14 Marks)

1. a) Explain advantage of Arch Action over Beam Action. [2M]

b) Explain how we account effect of wind on a structural frame. [2M]

c) Explain how joint rotations develop and their influence on different types of support. [2M]


d) Explain procedure for accounting eccentric loads at joint in analysis. [3M]

e) What are Rotation contributions and displacement contributions? [3M]

f) Explain Stiffness and flexibility of a system. [2M]


PART –B (56 Marks)

2. Calculate Horizontal thrust, Reactions at supports and Maximum bending [14M] moment on a parabolic three-hinged arch is loaded as shown in figure.

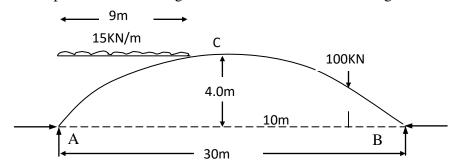

- 3. a) What are lateral loads? What are inconveniences associated with these lateral loads? Why we adopt approximate methods to analyze a structure with lateral loads?
  - b) List out and explain concepts adopted in analyzing a structure subjected to [7M] lateral loads by an approximate method.
- 4. a) List various parts in a suspension bridge with neat diagram and explain the [4M] loading arrangement.
  - b) A suspension bridge of 50 m span and 3.5 m wide platform is subjected to a load of 50 KN/m<sup>2</sup>. The bridge is supported by a pair of cables having central dip of 4.5 m. Find the necessary cross sectional area of the cable, if the maximum permissible stress in the cable not to exceed 150 N/mm<sup>2</sup>.

- 5. A continuous beam is built in at A and it is carried over rollers at B and C with spans of AB and BC being 12 m. The beam carries a uniformly distributed load of 25 kN/m over AB and a point load of 60 kN over BC 2.5 m from the support B, which sinks by 20 mm. Values of E and I are 2 x 10<sup>5</sup> N/mm<sup>2</sup> and 2x10<sup>9</sup> mm<sup>4</sup>. Calculate the support moments and draw bending moment diagram giving critical values. Use Moment Distribution method.
- 6. A portal frame ABCD fixed at A and D is loaded as shown in figure. Draw [14M] bending moment diagram for the frame adopting Kani's method.

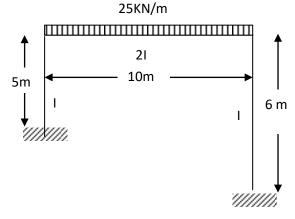

7. Explain Procedural steps involved in solving a Continuous beam with settlement [14M] of supports using Stiffness method of Analysis.

\*\*\*\*