

6451

BOARD DIPLOMA EXAMINATION, (C-16) OCTOBER—2020

DME—FOURTH SEMESTER EXAMINATION

PRODUCTION DRAWING

Time: 3 hours [Total Marks: 60

PART—A

 $5 \times 4 = 20$

Instructions: (1) Answer **all** questions.

- (2) Each question carries five marks.
- (3) Draw the following neatly with proportionate dimensions.
- (4) Use of production drawing tables is allowed.
- **1.** Calculate the values of maximum clearance, hole tolerance and shaft tolerance for the following dimensions of assembled part:

Hole 44.500 Shaf 43.975


- **2.** Draw the tolerance character symbol for the following:
 - (a) Angularity
 - (b) Run out
 - (c) Profile of any surface
 - (d) Flatness
 - (e) Straightness

/6451 1 [Contd....

- **3.** Mention the roughness grade symbol for the following roughness values :
 - (a) 50 µm
 - (b) 25 µm
 - (c) 1·6 μm
 - (d) 0·4 μm
 - (e) 0·05 μm
- **4.** Write the meaning of following symbols/specifications:
 - (a) Fe 410 Cu-k
 - (b) 30 CS B
 - (c) Hex bolt M 30 \times 1.0 \times 100 1S136454.6
 - (d) O-ring 10/2·5, viton
 - (e) Bearing No. 305

Instructions: (1) Answer any one question.

- (2) Each question carries forty marks.
- **5.** Study the given assembly drawing of the Knuckle joint shown in Fig. 1.
 - (a) Draw the part drawings for Fork End and Eye End 20
 - (b) Select suitable fits and tolerances 4
 - (c) Prepare the process sheet 7
 - (d) Indicate the surface roughness symbols and geometrical tolerance symbols 6
 - (e) List out the materials and quantity of the components. 3

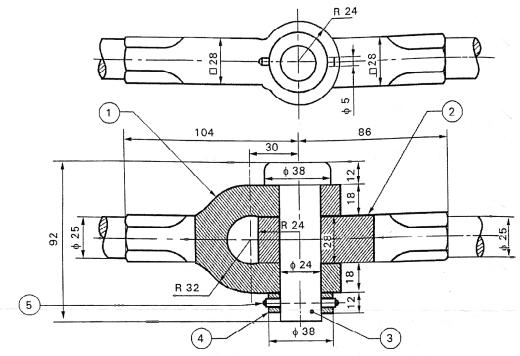

Bill of material

Part No.	Name	Raw material	Qty.
1.	Fork end	FS - Forging	1
2.	Eye end	FS - Forging	1
3.	Pin	MS - \$40×95	1
4.	Coller	MS - \$40 Bar stock	1
5.	Taper pin	MS - Std. component	1

Fig. 1

/6451

3

[Contd....

- **6.** Study the given assembly drawing of the tool post shown in Fig. 2.
 - (a) Draw the part drawings for pillar, block and screw 20
 - (b) Select suitable fits and tolerances 4
 - (c) Prepare the process sheet 7
 - (d) Indicate the surface roughness symbols and geometrical tolerance symbols 6
 - (e) List out the materials and quantity of the components. 3

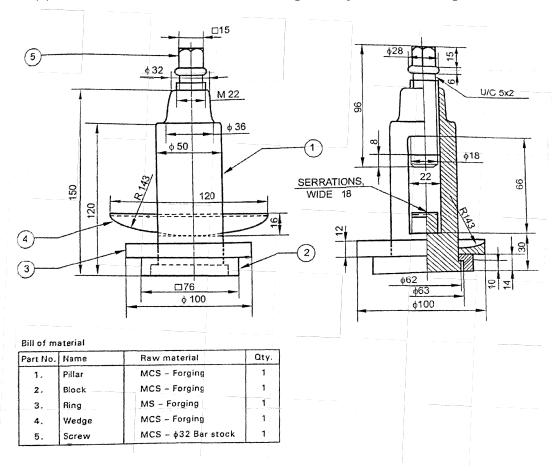


Fig. 2

* * *

/6451 4 AA20—PDF